

NT-2™ Connection System

Built on Safety and Reliability

The entire NT family of connectors has been designed to provide safety for personnel and equipment with a total ease of installation


Product Description

The NT-2™ design is based on the reliable, field proven technology of the H-4® subsea wellhead connector and has been in use since 1989. The NT-2™ connector was developed for applications with multiple makeup/break-out requirements across all surface applications.

Key features

The NT-2 connector family offers world-class performance including:



- Rapid assembly (up to 15x faster than API connections)
- Low torque
- Compact
- No special tools required
- No loose parts
- Self-aligning
- Actuation screws in compression
 - Resistant to H₂S
 - More resistant to high temperatures

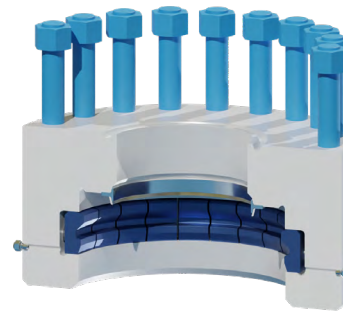

NT-2 Adapter



NT-2 Riser Connections

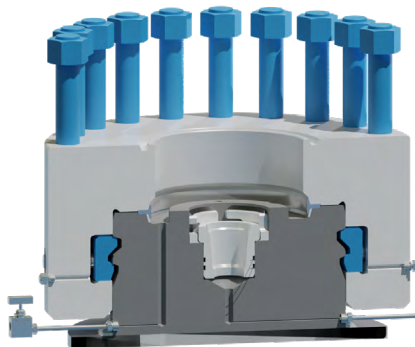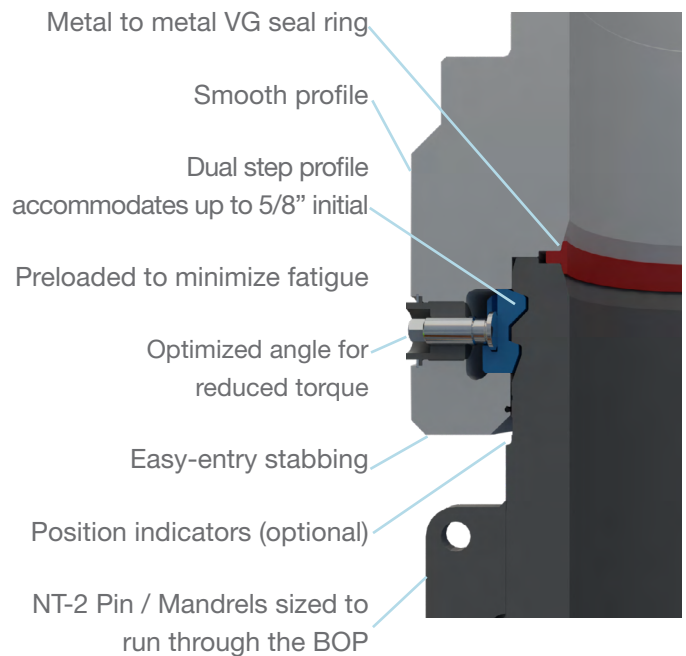

NT-2 Test Stump



NT-2 High Pressure Riser System

Engineering Summary Data

| Specification | |
|---------------------------|-----------------------------|
| Available sizes | From 7 1/16 in to 21 3/4 in |
| Available pressure ranges | 2,000 – 20,000 psi |

